

Description

SB-WS3M-UK 3 Buttons Wall Switch) is the serial of multi function Big Button Wall Switch.  
1、 2、 3 buttons available for selection.

Environmental Conditions

- . Work Temp: -5℃~45℃
- . Work Relative Humidity: 20%~90%
- . Storage Temp: -40℃~+55℃
- . Storage Relative Humidity:10%~93%
- . Protection Level: : IP2.0


Features

- . IR Function
- . Multi Key Mode: Single on, Single Off, Single on -off, Combination on, Combination off, Momentary etc.
- . Multi Control Type: Scene, Sequence, Timer, Universal Switch, Single Channel control, Broadcast Scene, Broadcast channel, curtain function etc.
- . LED Back Light Adjustable;
- . Electronic Password Setting;
- . ID can be set by network, remote program and management function available

Performance Parameters

- . Power Input: DC15-30V
- . Power Consumption : 15mA/DC24V
- . Installation : GI (3"x3") Back Box
- . Dimension : 86.4mm×86.4 mm×35mm

Installation Dimension

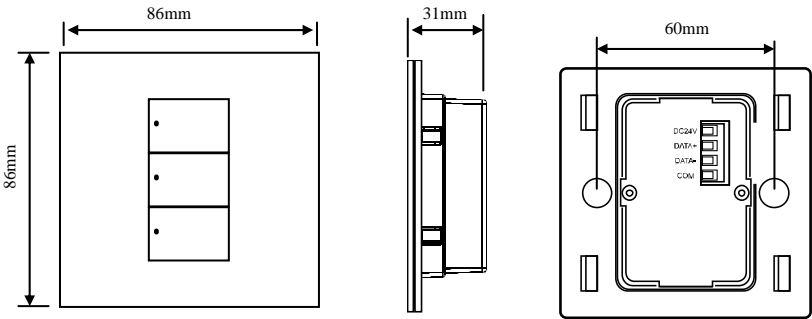


Installation Requirements


Standard GI 3"x3" Back Box

BUS Interface Connection: CAT-5 UTP

System Connection Diagram

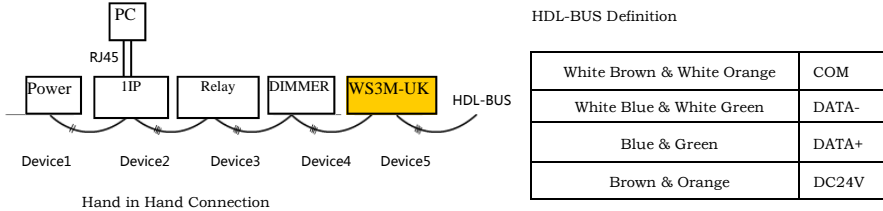

Wiring for installation

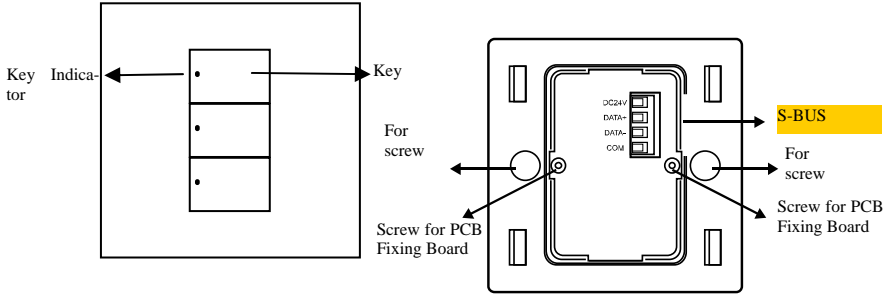

Packing List

SB-WS3M-UK	1 PC
Installation Manual	1 PC

Safety and Maintenance

Read All Instructions in detail before use

Make sure good Ventilation Environment

Pay Attention to Water-proof, shake-proof and dust-proof when using

Non-Rain, Non-Contact with other liquids or corrosive gases

Should be dried in time if invaded by water or liquid

Contact Professional maintenance staff or HDL company when Product has problem