

Description

7 "color touch screen SB-WL-TS7 is a computer level touch-screen operation controller developed by HDL, is part of HDL intelligent lighting control systems , with a touch, Timing automatic control and parameter management functions, using Ethernet communication , it has a convenient interface and advanced technology.

Environmental conditions

Working temperature : 0℃~45℃

Working Relative Humidity : 20%~90%

Storage temperature : -40℃~+55℃

Storage Relative Humidity : 10%~93%

Features


- . Power supply : DC24V
- . Bus Power Consumption : 250mA/DC24V
- . signal interface : HDL-BUS
- . CPU : 400MHz
- . FLASH ROM : 64M (32M for option)
- . SDRAM : 64M
- . Operating system : Windows CE 4.2net
- . Ethernet interface : RJ45 10/100M
- . Installation type : Wall Mount
- . Dimension : 254mm×174mm×30mm

Performance parameters


- . There are six scenes control keys
- . With 7 " true color touch screen display
- . Using Ethernet communication
- . Built-in RTC real time clock

Installation Dimension


- . To install the back box with distance 22 mm from the hole to the edge as upside, as shown like below .
- . it's better to fixed the back box 1mm surface of the wall, as shown at right.

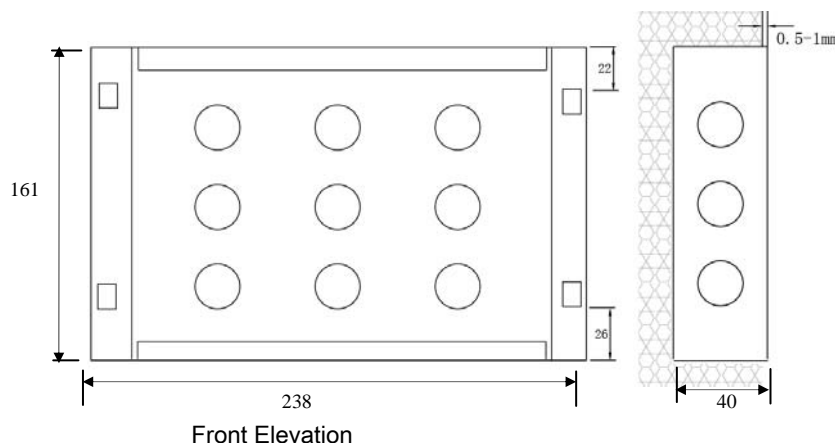

Installation Dimension

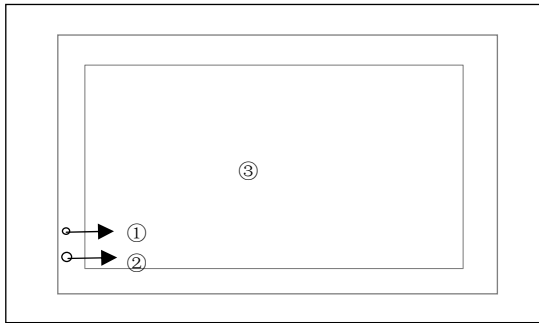


Front Elevation

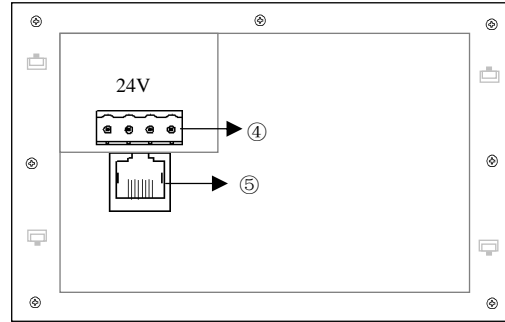

Back Elevation

- ① Reset button: Press this key to reset the machine.
 - ② Infrared receiver.
 - ③ 7 "color touch screen.
 - ④ Power terminal connector: DC24V, empty, empty, GND.
 - ⑤ RJ45: Ethernet interface, each touch screen has an IP address.
- Interface functions: Ethernet signal input.

System connection diagram

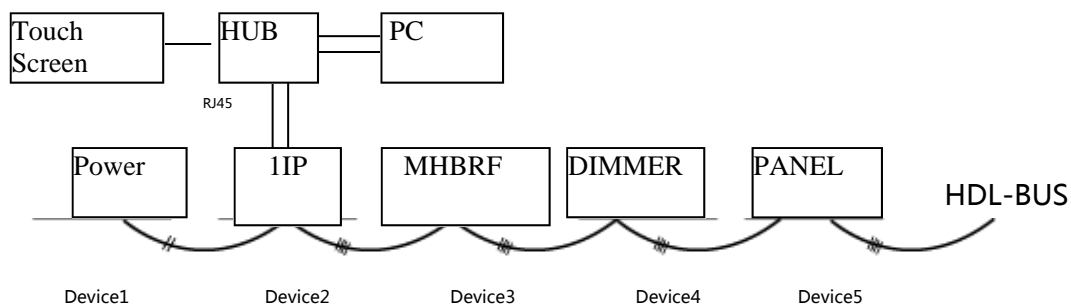

Safety and Maintenance

Read All Instructions in detail before use
 Make sure good Ventilation Environment
 Pay Attention to Water-proof, shake-proof and dust-proof when using
 Non-Rain, Non-Contact with other liquids or corrosive gases
 Should be dried in time if invaded by water or liquid
 Contact Professional maintenance staff or HDL company when Product has problem